

نيوم، بيرفكت، اوزون - شرائح فينيل فاخر


السريع للأرضيات والمفروشات

المواصفات التقنية

| | | |
|---------------------------|-------------------------|---|
| Type & Composition | | PVC Laminated Floor Covering |
| Application | | Commercial, Residential |
| Surface Treatment | | PU & Anti-bacterial, Per design |
| Profile | | Beveled / Non-beveled, Per design |
| Tile Size (mm) | EN 427 | 184 x 950 |
| Total Thickness (mm) | ISO 24346 (EN 428) | 3.0 |
| Wear Layer Thickness (mm) | ISO 24340 (EN 429) | 0.3 |
| Fire Rating | EN 13501-1 | Bfl - S1 |
| | Mekel Bumer Test | Pass |
| Heat Stability | KSM 3802 | 0.3mm / 0.05 (80 °C + 2°C, 6hr / hr) |
| Slip Resistance | BS 7976-2 | PVC Laminated Floor Covering RZ Surface Roughness : Moderate |
| Residual Indentation | EN ISO 24343-1 (EN 433) | ≤ 0.10 mm |
| Color Fastness | ISO 105-B02 | ≥ 6 |
| Dimensional Stability | ISO 23999 (EN 434) | ≤ 0.25 % |
| Flexibility | EN 435 | No Crack was found |
| Electrical Behavior | EN 1081 | Pass |

Dryback

Eco-friendly various function flooring

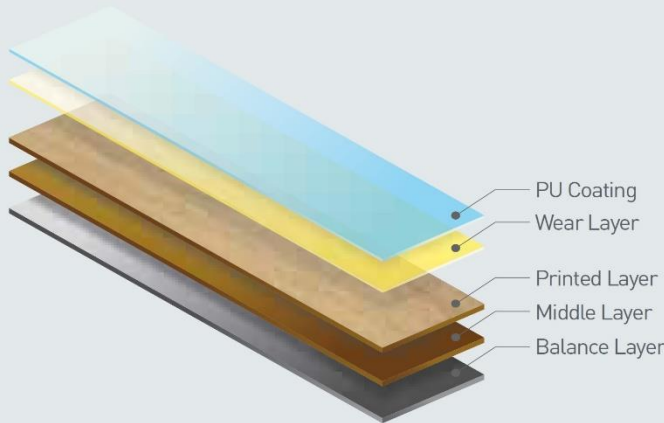

High Density PU Coating



Application of US EPA approved organic and inorganic hybrid antibacterial agents



Recycled Material



Various Color /
Pattern Design Collection