



Business Line


Carpet Tiles




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	650 g/m2
NUMBER OF TUFTS	184860 /m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.3 mm / 5.5 mm
TOTAL HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


COLOURLINE




TOTAL CHILL - 74




TOTAL CHILL - 659



TOTAL CHILL - 672



TOTAL CHILL - 695




TOTAL CHILL - 679






HOW TO INSTALL

QUARTER TURN

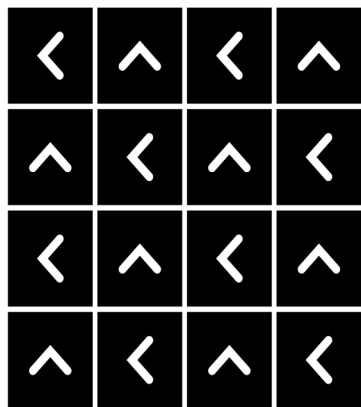

BRICK

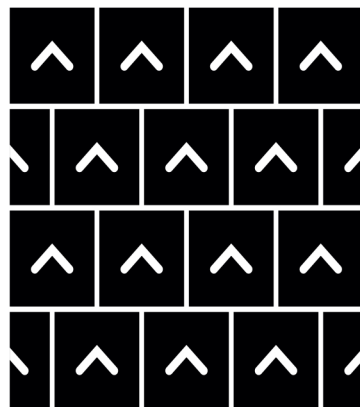



alsourayia.com