



Olympic Carpet Tile



2495 - Brick





2476 - Quarter Turn



2458 - Quarter Turn


Colour Bank




2495




2479

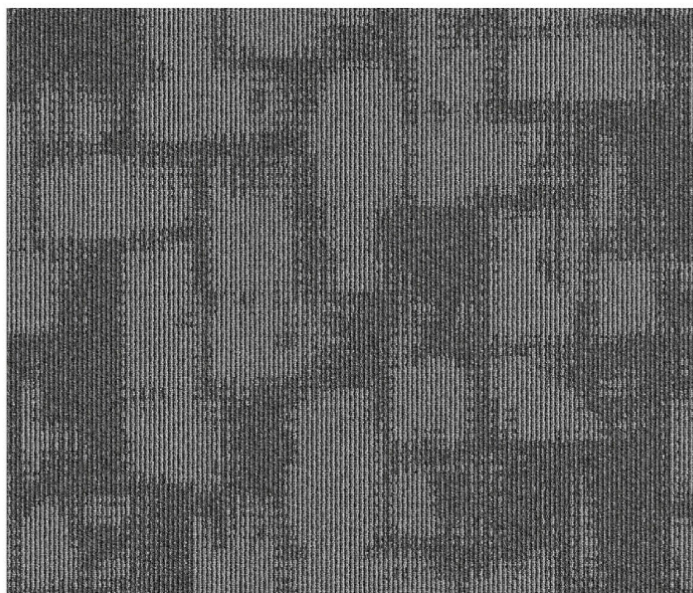

2476

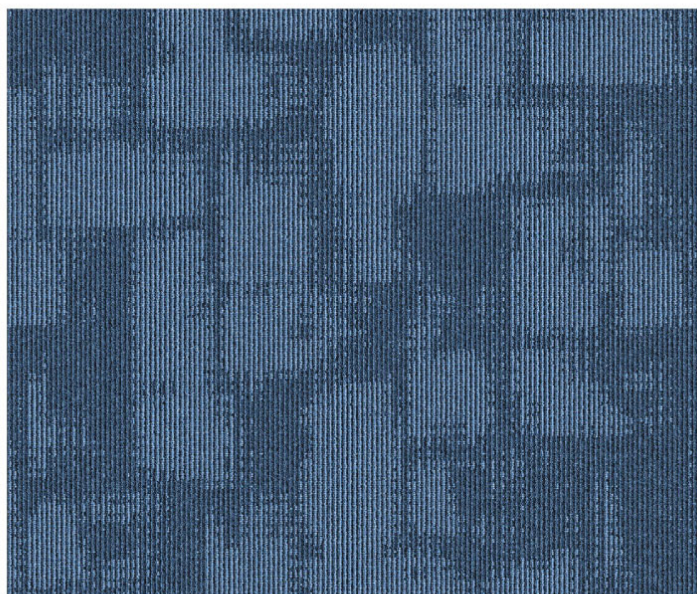

2455

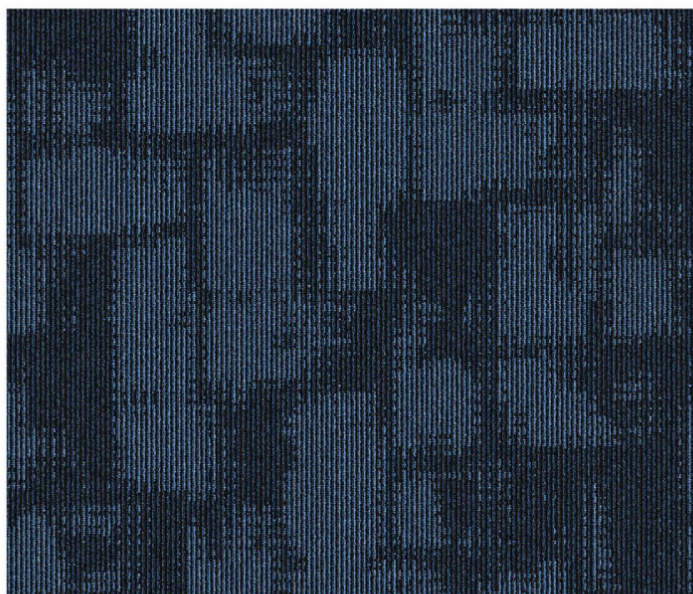

2458

Details

Construction

Loop Pile

Fiber

100% Olefin

Dye Method

Solution Dyed

Tile Size

50 cm x 50 cm

Pile Weight

450 g/m²

Tufts per m²

212850

Pile Height

3.5 mm

Total Thickness

6.5 mm

Primary Backing

Non Woven


Secondary Backing

PVC

Tufting Gauge

1/12"

INSTALLATION METHODS:



Quarter Turn



Brick

VOC (Green Label Plus)	ASTM D5116-06	<0.5 mg/m ² /hour
Flammability (Pill Test)	ASTM D-2859/FF 1-70/16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%

Al Sourayia
Flooring and Furniture



@alsourayiasff



alsourayia

